





# DIRECT BURIAL DB120

## UTILITY DUCT

Size	Average Outer Diameter (OD) (inches)	Wall Thickness (T)	
		Inches	mm
1	1.315 ± 0.005	0,060	1,52
1-1/2	1.900 ± 0.006	0,060	1,52
2	2.375 ± 0.006	0,077	1,96
3	3.500 ± 0.008	0,118	3,00
3-1/2	4.000 ± 0.008	0,136	3,45
4	4.500 ± 0.009	0,154	3,91
5	5.563 ± 0.010	0,191	4,85
6	6.625 ± 0.011	0,227	5,77

Direct Burial DB120 Utility Duct, Models - 1, 1-1/2, 2, 3, 3-1/2, 4, 5, 6

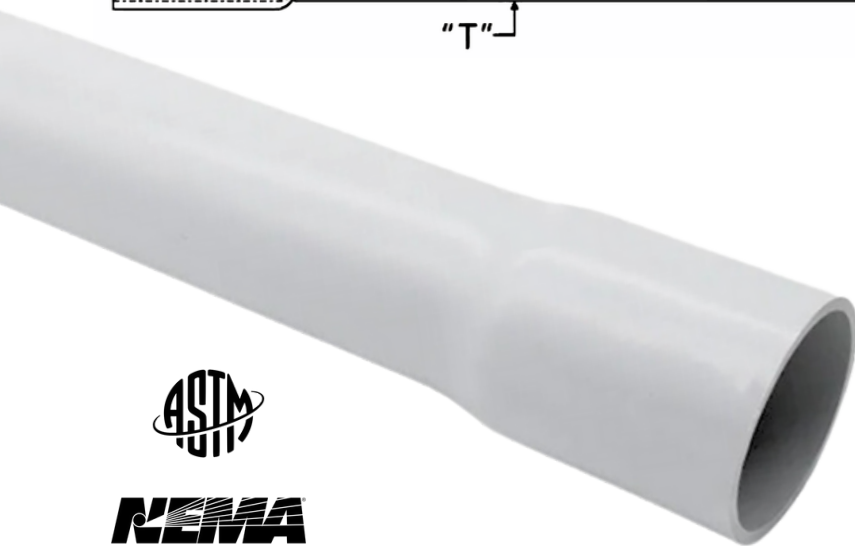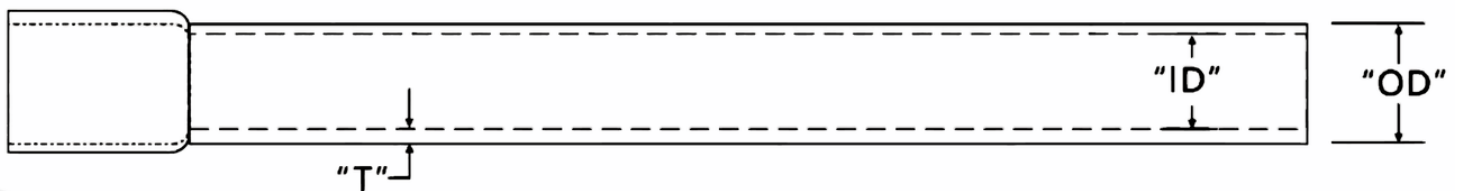

- Conforms to ASTM & NEMA
- Direct Burial Application
- Impact Resistant
- Chemical & Corrosion Resistant
- Self Extinguishing
- Standard 10ft 20ft lengths
- With or without belled end